



ENERPAC[®]
INDUSTRIAL TOOLS




CONVERTS 2-7 BAR
AIR PRESSURE
TO 18-900 BAR
HYDRAULIC PRESSURE

THE HIGH-FLOW 'MULTI-FLUID' PUMP



ENERPAC
A UNIT OF APPLIED POWER INC.

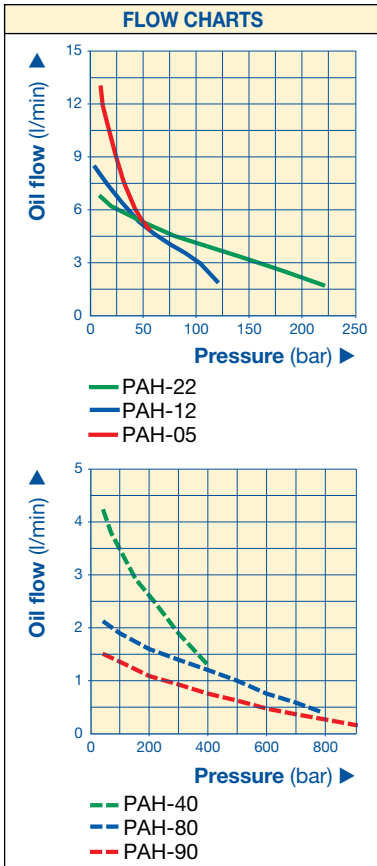


- The PAH-Series pump can be reservoir mounted or connected to an external tank.
- Converts 2-7 bar air pressure to 18-900 bar hydraulic pressure
- Can be used with hydraulic oil or other non corrosive liquids such as water, kerosene, gasoline etc.
- Six models offer many pressure-flow combinations
- User supplied valving and reservoir provides system flexibility
- Exhaust-air muffler lowers sound level for reduced operator fatigue
- Heavy duty construction for long life, even in harsh environments
- Ideal for multi-fluid testing applications



All PAH-Series air hydraulic pumps require a user supplied remote valve and reservoir.

For more ordering information, call your Enerpac distributor.

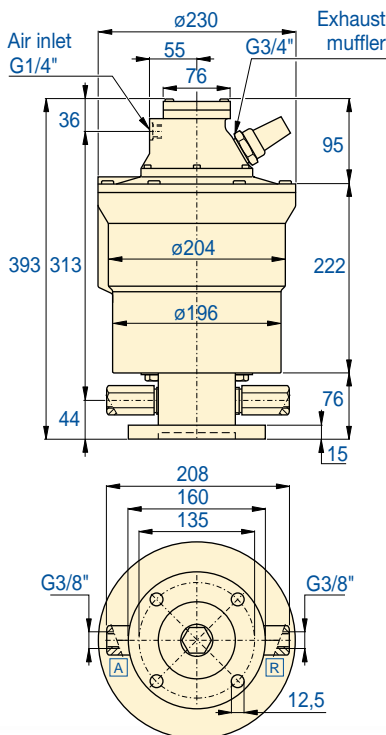

| Maximum Pressure Rating (bar) | Output Flow Rate (l/min) | | Model Number | Air Pressure Range (bar) | Pressure Intensification Ratio | Sound Level (dBA) | Weight (kg) |
|----------------------------------|-----------------------------|------|--------------|-----------------------------|--------------------------------|----------------------|----------------|
| | no load | load | | | | | |
| 56 | 13,0 | 5,0 | PAH-05 | 2-7 | 1:9 | 80-85 | 19 |
| 120 | 8,5 | 2,0 | PAH-12 | 2-7 | 1:20 | 80-85 | 19 |
| 220 | 6,8 | 1,7 | PAH-22 | 2-7 | 1:36 | 80-85 | 19 |
| 400 | 4,2 | 1,3 | PAH-40 | 2-7 | 1:67 | 80-85 | 19 |
| 800 | 2,1 | 0,38 | PAH-80 | 2-7 | 1:127 | 80-85 | 19 |
| 900 | 1,5 | 0,17 | PAH-90 | 2-7 | 1:165 | 80-85 | 19 |

Your Enerpac Distributor:

ENERPAC Limited
Unit 3
Colemeadow Road
North Moons Moat
Redditch
Worcester B98 9BP
United Kingdom
Tel: +44 01527 598 900
Fax: +44 01527 585 000